


## BSK0003-16

## KARABINER B-SAFE STEEL 19mm GATE TWIST LOCK 41kN X 16kN

To comply with the requirements of AS/NZS 1891.1(2007) all hooks and karabiners used within height safety systems must have the following features:

- Be self closing and locking
- 20kN Spine Strength
- Requires two deliberate actions to open
- Gate Strength of: 1kN on face and 1.5kN on side

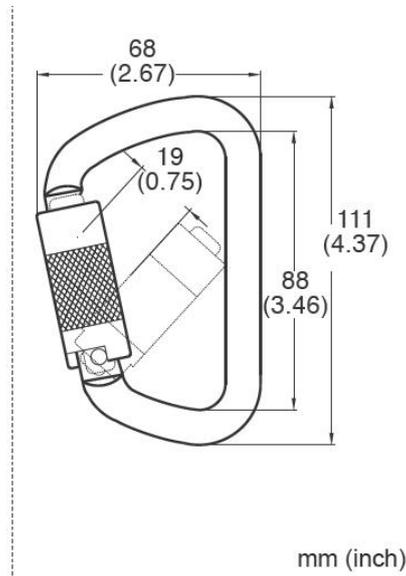

B-Safe BSK0003-16 surpasses current AS/NZS1891.1 (2007) requirements with higher spine and gate capacity –

### Tested to AS/NZS1891.1 (2007)

- Clause 5.2

### Manufacturers Specification:

- Manufacturer – Yoke Industrial Corp.
- Minimum Spine Breaking Strength 41kN
- Minimum Gate Breaking Strength 16kN (side and face)

