

# LIFESTYLE SAFETY RANGE



## BOSS

Executive styled lightweight safety shoe that looks the part while in the office and performs on site. Ideal for site managers, engineers, foremen and other workers that split their time between the office, factory or site.



**SIZES**  
**4-15**  
1/2 SIZES 7.5-10.5  
**WEIGHT**  
**610<sup>g</sup>**

**COLOURS**



### PERFORMANCE SYSTEMS

#### WIDEcap

Wide anatomical shaped toecap to reduce rubbing and nerve impingement.

#### SiliconeGelInnersole

Extra cushioned innersole with additional shock attenuation properties and improved durability.

#### Anti-torsionSole

Provides additional midfoot stability and support.

#### TRACTIONSole

All terrain sole for exceptional grip on loose surfaces.

#### PhylonMidsole

Premium midsole cushioning material for shock attenuation and a smooth ride.

#### FITCHECK

Registered fitting guide printed on the insole to indicate the correct spacing between the end of the longest toe and the toecap.

### SAFETY SYSTEMS

#### COMPOSITEToecap

Lightweight, metal free, nonconductive, insulating and airport friendly safety toecap that complies with Australian/New Zealand (AS/NZ S2210), European (EN-ISO 20345) and American standards (ASTM F2413-11).

#### slipRESIST-A

Sole slip resistant to soap (SLS) on ceramic tiles.

#### 300°CHeatResistant

Nitrile rubber sole that is hard wearing and resistant to extreme heat.

#### H<sub>2</sub>O RESISTANT

Footwear designed to shed water.

#### LOWcatchsole

Low profile sole at the toe to reduce the risk of tripping.

# HAZARD SOLUTION GUIDE

## TRIPS & FALLS

- Lightweight footwear to reduce fatigue of the leg muscles that lift the toes.
- **LOWcatchsole** to improve swing phase ground clearance at the toe to reduce the risk of tripping.

## HOT CONTACT

- 300°C Heat Resistant nitrile rubber outsole provides protection in high heat environments. Ideal for workers in road construction and other occupations that expose workers to hot surfaces or objects.

## PRODUCT DETAILS

### APPROVED STANDARDS

- AS/NZS 2210.3 (Class I SB SRA)
- EN - ISO 20345 (SB SRA)
- ASTM F2413 - 11 (M/I/75/C/75)

**OUTSOLE:** Nitrile Rubber

**TOECAP:** Composite

**UPPER:** Full Grain Leather

### PRODUCT CODES:


xxx represents sizing i.e. size 12 is 120 and size 9.5 is 095

### BLACK SHOE CODE:


MKBOSS-BBFxxx



## FIT GRID

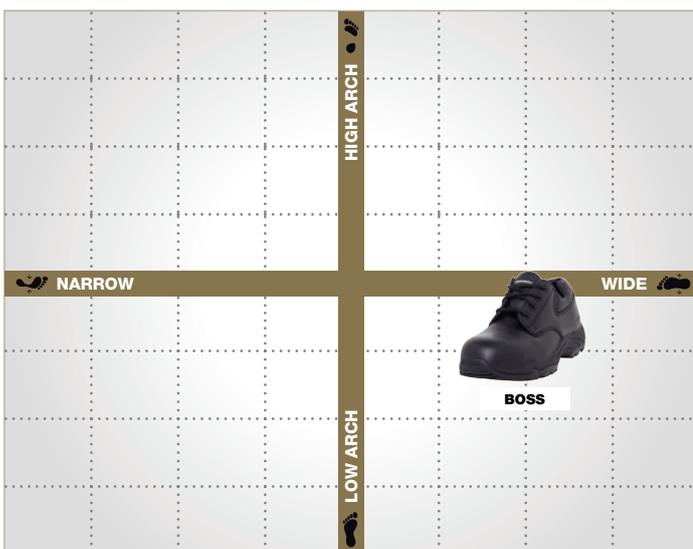

## SOLE SELECTION GRID

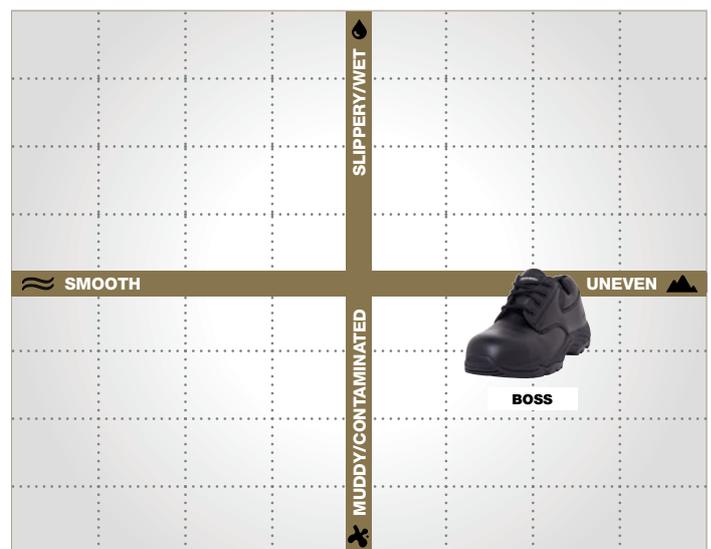

## MACKBOOTS.COM.AU | 1300 350 216

Mack Footwear is sold under licence from Mack Trucks, Inc. All rights reserved. \*Weight disclaimer. Footwear weights are based on a men's UK8 for a single shoe or boot and a ladies UK10 for women's shoes. Due to the nature of manufacturing there will be subtle variation between pairs. Disclaimer: Every reasonable effort has been made to ensure the accuracy of the Product information in this document. This document must not be regarded as an infallible guide. **Mack Boots™** accepts no responsibility in this regard. As product details may change from time to time please contact **Mack Boots™** to gain the latest information.



AS/NZS 2210 Australian /New Zealand Standards  
EN - ISO 20345 European Standards  
ASTM F2413 American Standards